


Operation: PUSH-PULL



**LTEM NO.:CS-303-T**  
(TF+2MICRO SIM CARD)

Unit:mm

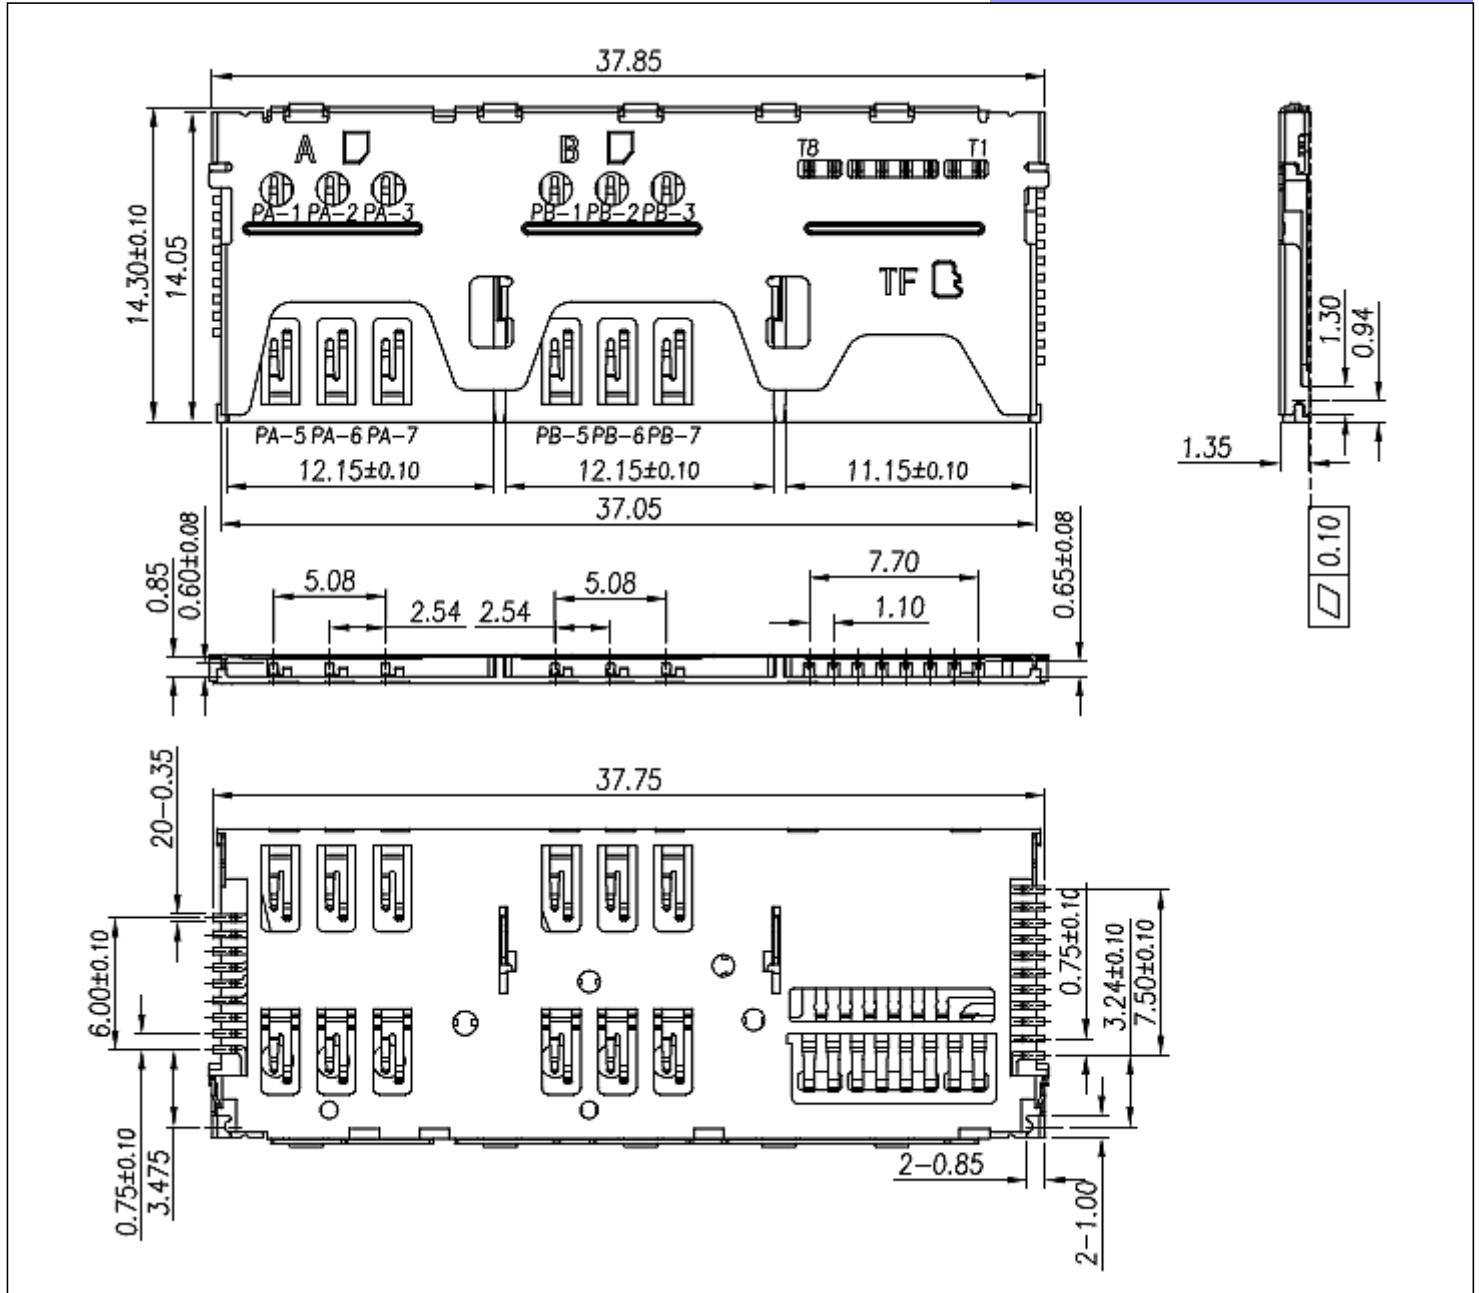

### Technical parameter

PROJECT		LEVEL	A[better product]	B[average product]	C[low product]
Electrical Properties	Initial Contact Resistance		30mΩ max.	30mΩ max.	no data!
	Contact Resistance		100mΩ min.100V DC	Skey/PD: 50mΩ min.100V DC	
	Withstand Voltage		300V AC for 1min	250 V AC for 1min	
Durable Performance	There No Load		8,000 Cycles	<b>7,000 Cycles</b>	no data!
	Rated Load		6,500 Cycles 50mΩ max.	<b>5,000 Cycles</b> <b>30mΩ max.</b>	no data!
Insertion Force			4.0Kgf MAX (Springback: )		

表面貼裝 SMT



側向導入 LATERAL

精密部品 NICETY

可靠 STABILIZE

適合環保 RoHS

CIRCUIT BOARD SIZE  
(Vertical view)

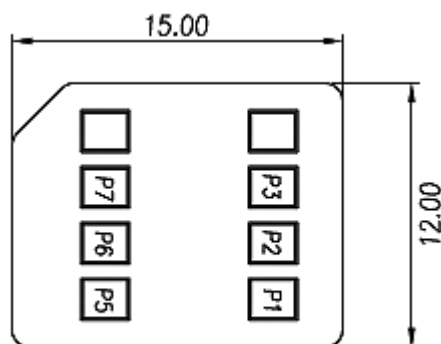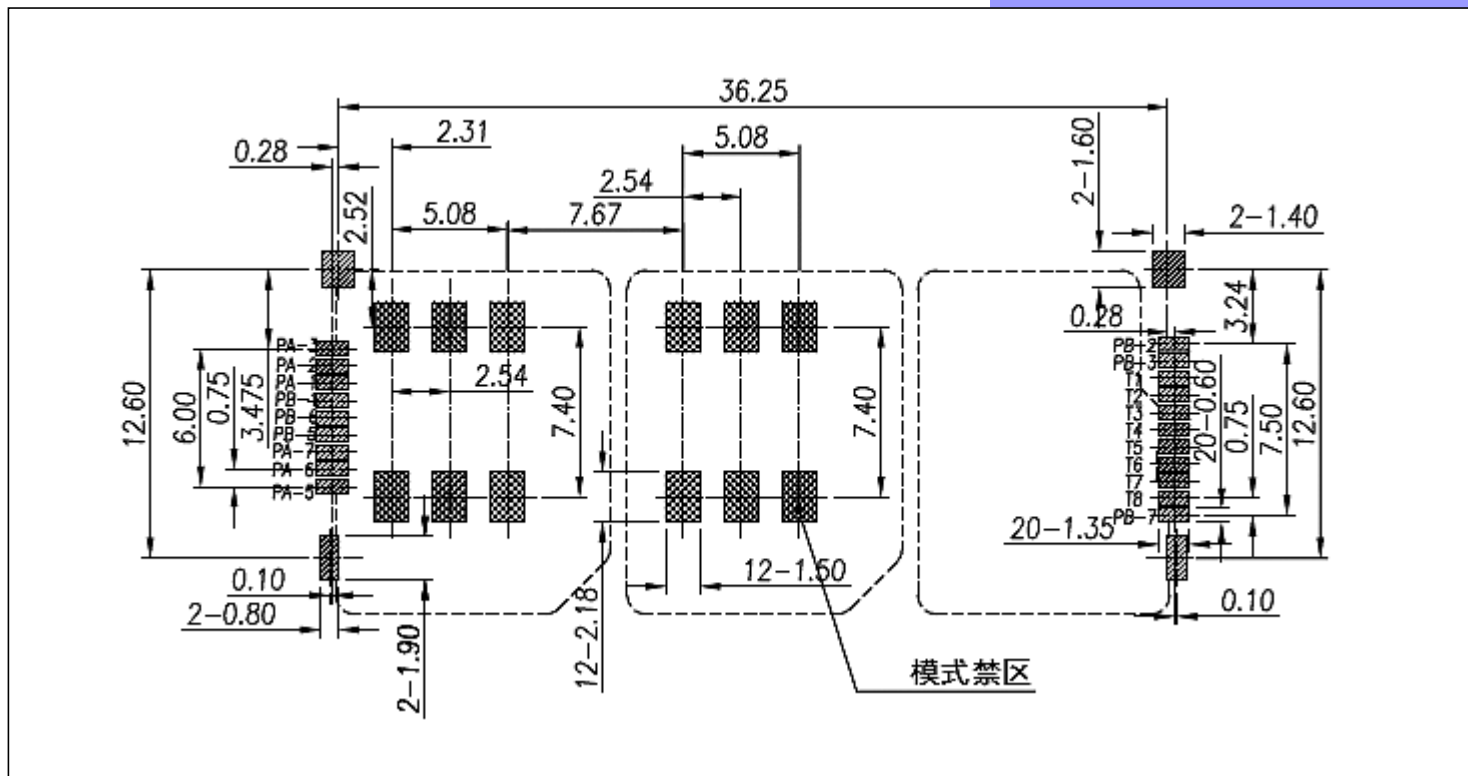


MICRO SIM CARD

SIM PIN Assignment

Pin No.	Pin NAME	Type	Description
P①	卡電源	1	VCC
P②	復位	1	RST
P③	時鐘	1	CLK
P⑤	接地	1	GND
P⑥	Vpp	1	VPP
P⑦	輸入/輸出	1	I/O

TF CARD Pin	DESIGN
P①	DAT2 I/O/PP Date Line[Bit 2]
P②	CD/DAT3 I/O/PP Card Detect Date Lin(BIT3)
P③	CMD PP Command Response
P④	VDD S Supply voltage
P⑤	CLX I Clock
P⑥	Vss S Supply voltage ground
P⑦	DAT 0 I/O/PP Date Line [Bit 0]
P⑧	DAT 1 I/O/PP Date Line [Bit 1]

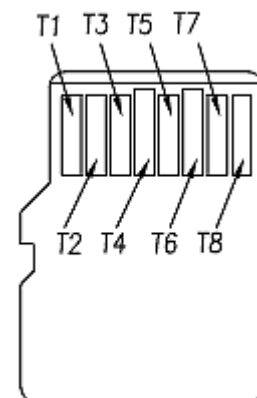

注記 NOTICE

1. 碩方電子公司擁有最終解釋權； The company reserves the right of final interpretation;
2. 文件禁止外洩、轉載； Leaked and reproduced prohibited;
3. 未經授權修改無效。 Modify is invalid.